

## LECTURE 1: Introduction into Antenna Studies


(Definition and circuit theory description. Brief historical notes. General review of antenna geometries and arrangements. Wireless vs. cable communication systems. The radio-frequency spectrum.)

### 1. Definition and circuit theory description.

The antenna (aerial, EM radiator) is a device, which radiates or receives electromagnetic waves.

The antenna is the transition between a guiding device (transmission line, waveguide) and free space (or another usually unbounded medium). Its main purpose is *to convert the energy of a guided wave into the energy of a free-space wave (or vice versa) as efficiently as possible, while in the same time the radiated power has a certain desired pattern of distribution in space.*

- a) transmission-line Thevenin equivalent circuit of a radiating (transmitting) system

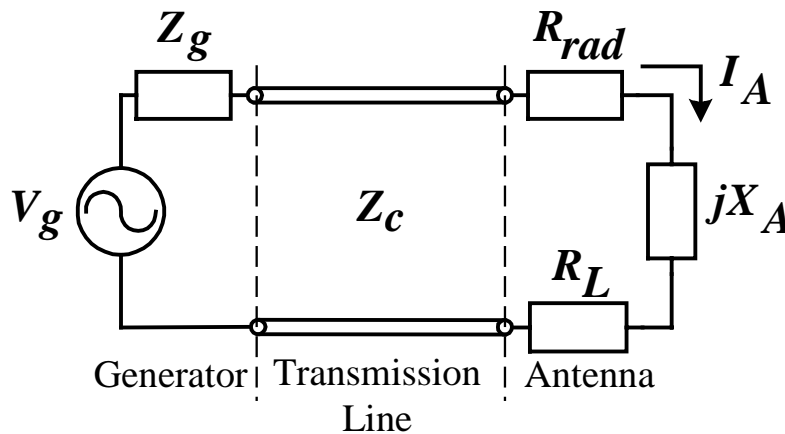

$V_g$  - voltage-source generator (transmitter);

$Z_g$  - impedance of the generator (transmitter);

$R_{rad}$  - radiation resistance (related to the radiated power

$$P_{rad} = I_A^2 \cdot R_{rad}$$


$R_L$  - loss resistance (related to conduction and dielectric losses);

$jX_A$  - antenna reactance.

Antenna impedance:  $Z_A = (R_{rad} + R_L) + jX_A$

One of the most important issues in the design of high-power transmission systems is the matching of the antenna to the transmission line (TL) and the generator. Matching is specified most often in terms of VSWR. Standing waves are to be avoided because they can cause arcing or discharge in the TL. The resistive/dielectric losses are undesirable, too. They decrease the efficiency factor of the antenna.

b) transmission-line Thevenin equivalent circuit of a receiving antenna system

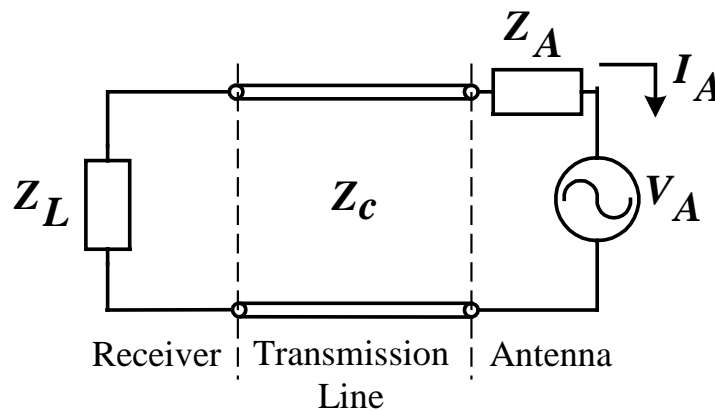

The antenna is a critical component in a wireless communication system. A good design of the antenna can relax system requirements and improve its overall performance.

## 2. Brief historical notes.

- James Clerk Maxwell formulates the mathematical model of electromagnetism (classical electro-dynamics), “*A Treatise on Electricity and Magnetism*”, 1873. He shows that light is an electromagnetic (EM) wave, and that all EM waves (light included) propagate through space with the same speed, which depends on the dielectric and the magnetic properties of the medium.



- Heinrich Rudolph Hertz demonstrates in 1886 the first wireless EM wave system: a  $\lambda/2$ -dipole is excited with a spark; it radiates predominantly at about  $\lambda \approx 8$  m; a spark appears in the gap of a receiving loop. Hertz discovers the photoelectric effect and predicts that gravitation would also have a finite speed of propagation. In 1890, he publishes his memoirs on electrodynamics, simplifying the form of the electromagnetic equations, replacing all potentials by field strengths, and deducing Ohm's, Kirchhoff's and Coulomb's laws.



- May 7, 1895, the first wireless telegraph message is successfully transmitted, received, and deciphered. A brilliant Russian scientist, Alexander Popov (also spelled Popoff, Poppov), sends a message from a Russian Navy ship 30 miles out in sea, all the way to his lab in St. Petersburg, Russia. The Russian Navy declares Popov's historical accomplishment top secret. The title “Father of Radio” goes to G. Marconi.



- Guglielmo Marconi (the Father of Radio) sends signals over large distances. In 1901, he performs the first transatlantic transmission from Poldhu in Cornwall, England, to Newfoundland, Canada. The receiving antenna in Newfoundland was a 200-meter wire pulled and supported by a kite. The transmitting antenna in England consisted of 50 wires, supported by two 60-meter wooden poles.




- The beginning of 20<sup>th</sup> century (until WW2) marks the boom in wire-antenna technology (dipoles and loops) and in wireless technology as a whole, which is largely due to the invention of the DeForest triode tube, used as radio-frequency generator. Radio links are possible up to UHF (about 500 MHz) and over thousands of kilometers.

- WW2 marks a new era in wireless communications and antenna technology. The invention of new microwave generators (magnetron and klystron) leads to the development of the microwave antennas such as waveguide apertures, horns, reflectors, etc.

### 3. General review of antenna geometries and arrangements.


#### 3.1. Single-element radiators.

##### A. Wire radiators (single-element)

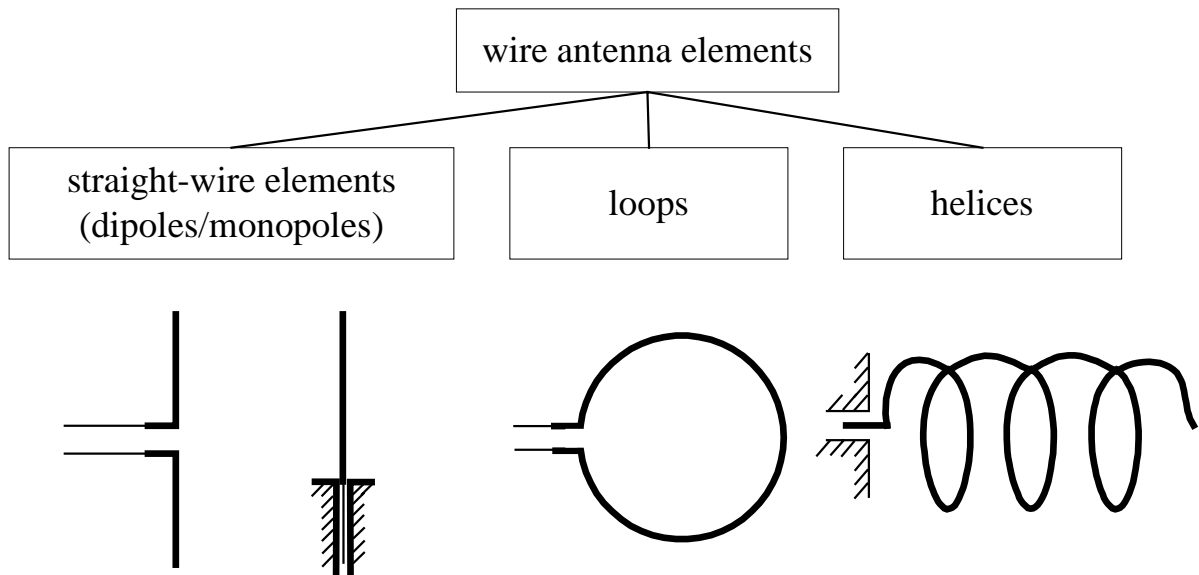


There is a variety of shapes corresponding to each group. For example, loops can be circular, square, rhombic, etc. Wire antennas are simple to make but their dimensions are commensurable with the wavelength. This limits the frequency range of their applicability (at most 1-2 GHz). At low frequencies, these antennas become increasingly large.


##### B. Aperture antennas (single element)

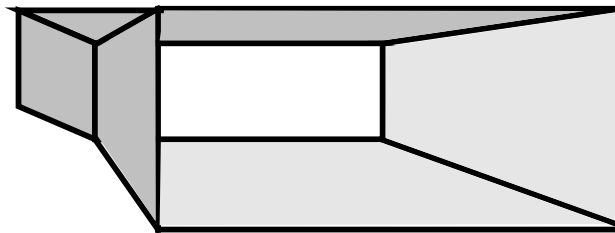


(a) Pyramidal horn

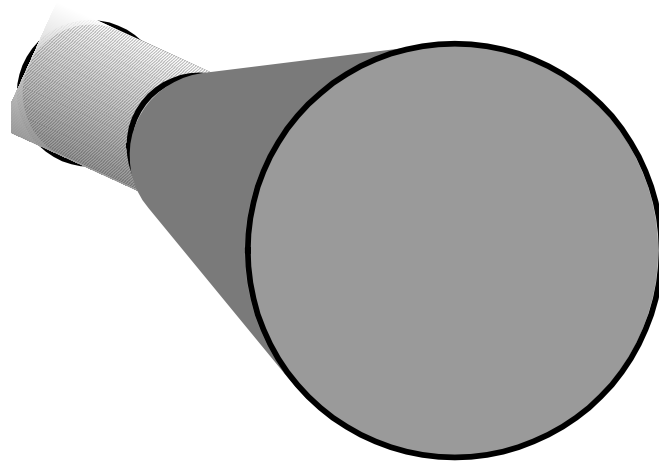

(b) Conical horn

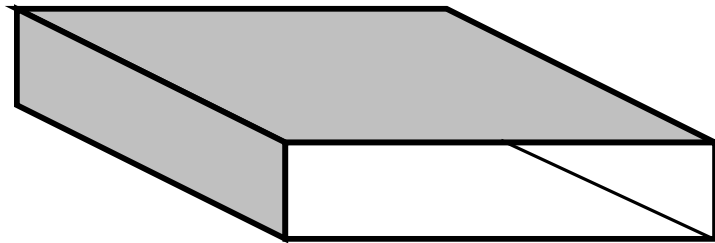

or

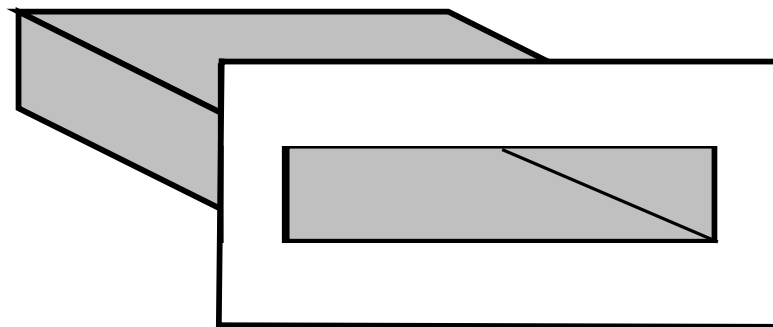


(c) Open rectangular waveguide


Aperture antennas were developed before and during the WW2 together with the emerging waveguide technology. Waveguide transmission lines were primarily developed to transfer high-power microwave EM signals (centimeter wavelengths), generated by powerful microwave sources such as magnetrons and klystrons. These types of antennas are preferable in the frequency range from 1 to 20 GHz.

## C. Printed antennas


### *PRINTED PATCH RADIATORS*

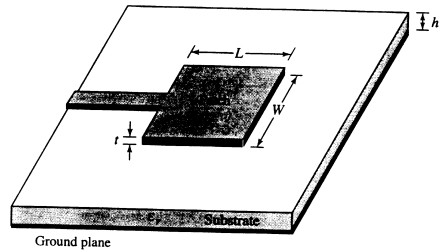

(a) Rectangular patch

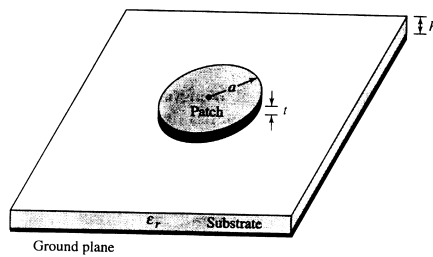


(b) Circular patch

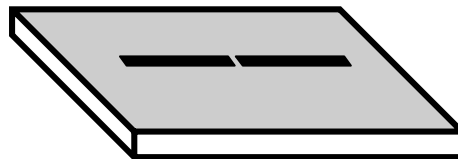


(c) Printed dipole


The patch antennas consist of a metallic patch etched on a dielectric substrate, which has a grounded metallic plane at the opposite side. They are developed in the beginning of 1970s. There is great variety of geometries and ways of excitation.

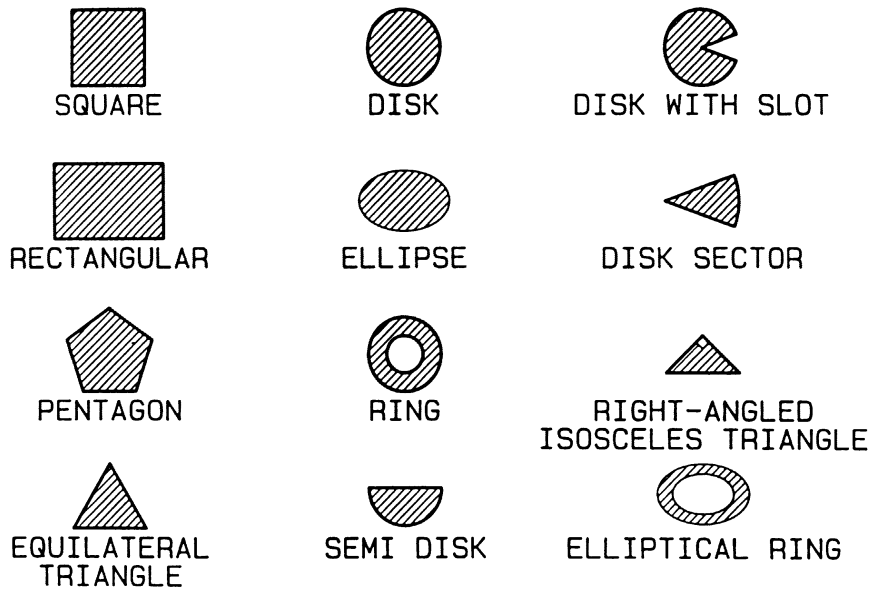


*PRINTED SLOT RADIATORS*




(a)




(e)




(b)




(f)




(c)



(g)



(d)




(h)

Slot antennas were developed in the 1980s and there is still intensive research related to new shapes and types of excitation. They are suited for integration with slot-line circuits, which are usually designed to operate at frequencies  $> 10$  GHz.

Both patch and slot antennas share some common features. They are easy and cheap to fabricate. They are easy to mount; they are light and mechanically robust. They have low cross-polarization radiation. Their directivity is not very high. They have relatively high conducting and dielectric losses. These radiators are widely used in patch/slot arrays, which are esp. convenient for use in spacecraft, satellites, missiles, cars and other mobile applications.

#### D. Leaky-wave antennas

These are antennas derived from millimeter-wave (mm-wave) guides, such as dielectric guides, microstrip lines, coplanar and slot lines. They are developed for applications at frequencies  $> 30$  GHz, infrared frequencies included. Periodical discontinuities are introduced at the end of the guide that lead to substantial radiation leakage (radiation from the dielectric surface).

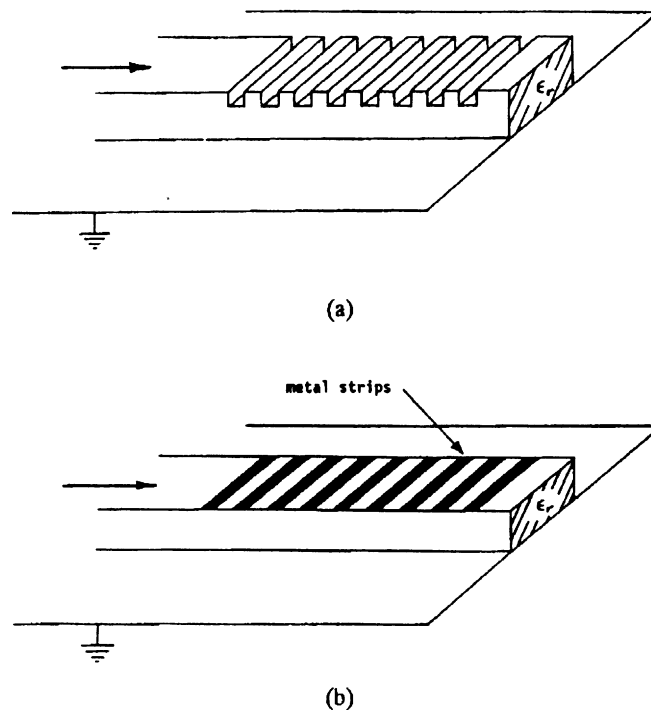

The antennas in the mm-wave band are of big variety and are still a subject of intensive study.




## E. Reflector antennas

A reflector is used to concentrate the EM energy in a focal point where the receiver/feed is located. Optical astronomers have long known that a parabolic cylinder mirror transforms rays from a line source on its focal line into a bundle of parallel rays. Reflectors are usually parabolic (paraboloidal). Actually, the first use of a parabolic (cylinder) reflector was used for radio waves by Heinrich Hertz in 1888. Rarely, corner reflectors are used. Reflector antennas have very high gain and directivity. Typical applications: radio telescopes, satellite telecommunications. They are not easy to fabricate and, in their conventional technology, they are rather heavy. They are not mechanically robust.


The largest radio telescopes:

- Max Planck Institut für Radioastronomie radio telescope, Effelsberg (Germany), 100-m paraboloidal reflector;
- National Astronomy and Ionosphere Center (USA) radio telescope in Arecibo (Puerto Rico), 1000-ft (304.8-m) spherical reflector;
- The Green Bank Telescope (the National Radio Astronomy Observatory) – paraboloid of aperture 100 m.


## TYPICAL REFLECTORS

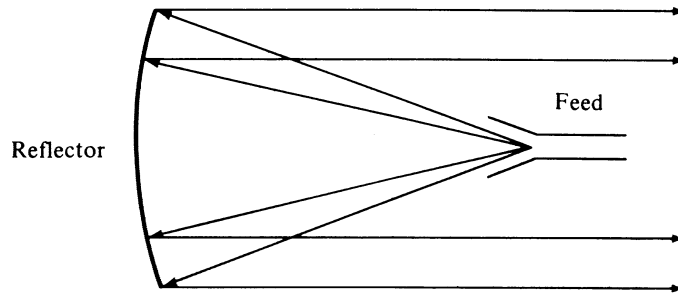

(a) Parabolic reflector with front feed

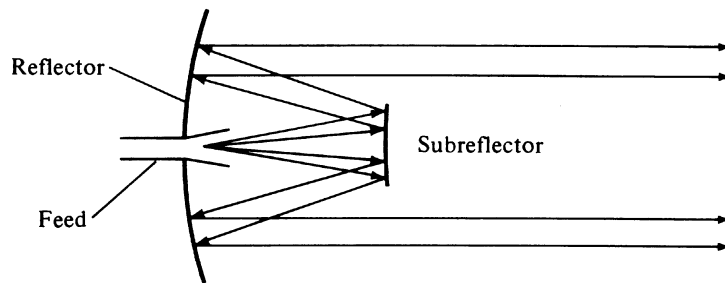


(b) Parabolic reflector with Cassegrain feed

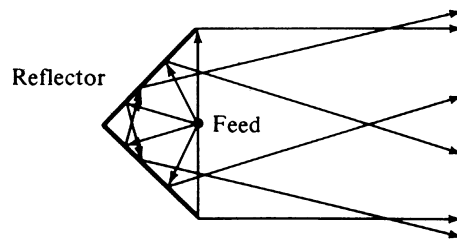


(c) Corner reflector

### F. Lens antennas

Lenses play a similar role to that of reflectors in reflector antennas. They collimate divergent energy into more or less plane EM wave. Lenses are often preferred to reflectors at higher frequencies ( $f > 100$  GHz). They are classified according to their shape and the material they are made of.

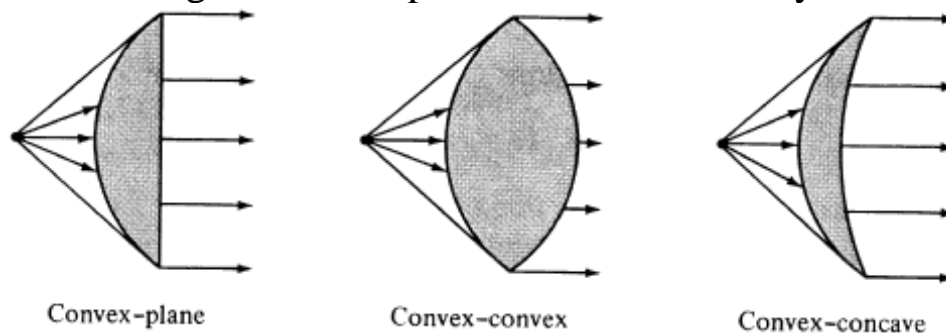


(a) Lens antennas with index of refraction  $n > 1$

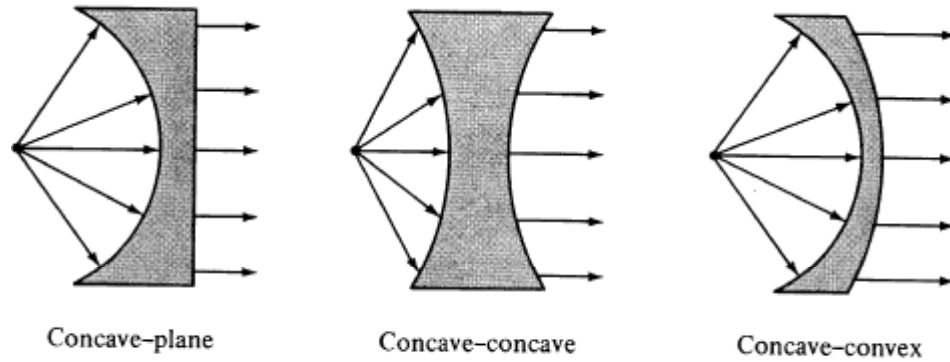


(b) Lens antennas with index of refraction  $n < 1$

### 3.2. Antenna arrays


Antenna arrays consist of multiple (usually identical) radiating elements. Arranging the radiating elements in arrays allows achieving unique radiation characteristics, which cannot be obtained through a single element. The careful choice and control of the phase shift and the amplitude of the signal fed to each element allows the change of the radiation pattern electronically, i.e. electronic scanning. Such arrays are called phased arrays. The design and the analysis of antenna arrays is a subject of its own, which is also related to signal processing. Intensive research goes on nowadays, concerning smart antennas, signal-processing antennas, tracking antennas, etc. Some commonly met arrays are shown in the figure below.

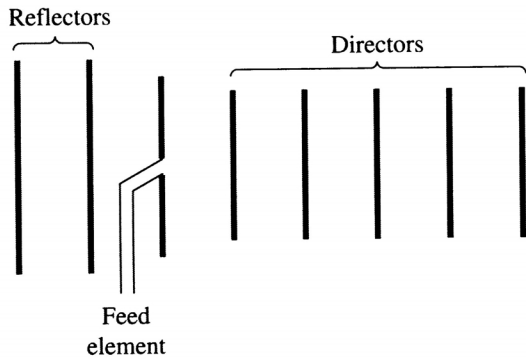


(a) Yagi-Uda array

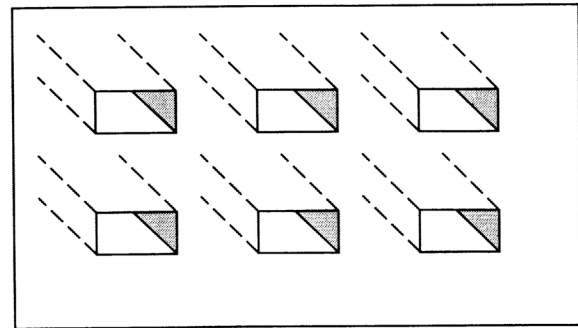

(b) Aperture array

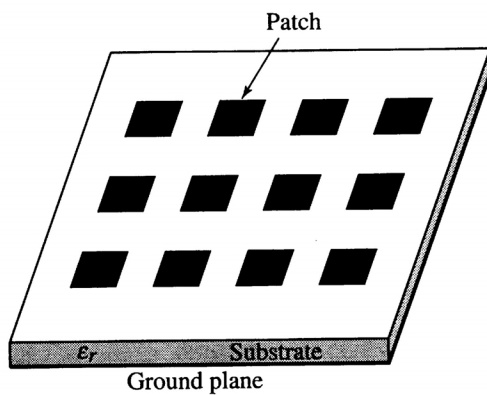

(c) Microstrip patch array

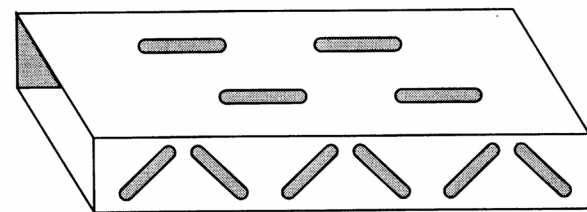

(d) Slotted-waveguide array


#### 4. Wireless vs. cable communication systems.

There are two broad categories of communication systems: those that utilize transmission lines as interconnections (*cable systems*), and those that use EM radiation with an antenna at both the transmitting and the receiving end (*wireless systems*).

In areas of high density of population, the cable systems are economically preferable, especially when broadband communication is in place. Even for narrow-band communication, such as voice telephony and low-data-rate digital transmission, it is much simpler and cheaper to build wire networks with twisted-pair cables, when many users are to be interconnected. Such lines introduce an attenuation of around 2-3 dB/km at frequencies about 10 kHz. These lines are not suitable at higher frequencies because of the higher losses and dispersion. At higher-frequency carriers, carrying broadband signals (TV transmission and high-data-rate digital transmission), coaxial cables are commonly used. The loss is around 4-5 dB/km. The least distortion and losses are offered by the

optical-fiber transmission lines, which operate at three different wavelengths: 850 nm ( $\cong 2.3$  dB/km), 1300 nm ( $\cong 0.25$  dB/km) and 1550 nm ( $\cong 0.25$  dB/km). They are more expensive though and the respective transmitting/receiving equipment is costly. Transmission lines provide a measure of security and noise-suppression (coaxial, optical-fiber), but they are not the best option in many cases (long distance, wide spreading over large areas, low frequency dispersion).

A fundamental feature of all transmission lines is the exponential increase of loss power. Thus, if the loss is 5 dB/km, then a 20-km line will have 100 dB power loss (input power is reduced by a factor of  $10^{-10}$ ), a 40-km line will have a 200 dB power loss. This makes it rather obvious why wireless systems are preferred for long-range communications, and in scarcely populated areas. In most wireless channels, the radiated power per unit area decreases as the inverse square of the distance  $r$  between the transmitting and the receiving point. Doubling the distance  $r$  would decrease the received power by a factor of 4 (or 6 dB will be added). Thus, if a particular system has a 100 dB loss at  $r=20$  km, doubling of its distance will result in 106 dB loss (as compared to 200 dB loss in a cable system). The comparison between the coaxial-line losses and free-space attenuation at  $f=100$  MHz is given in the figure below.

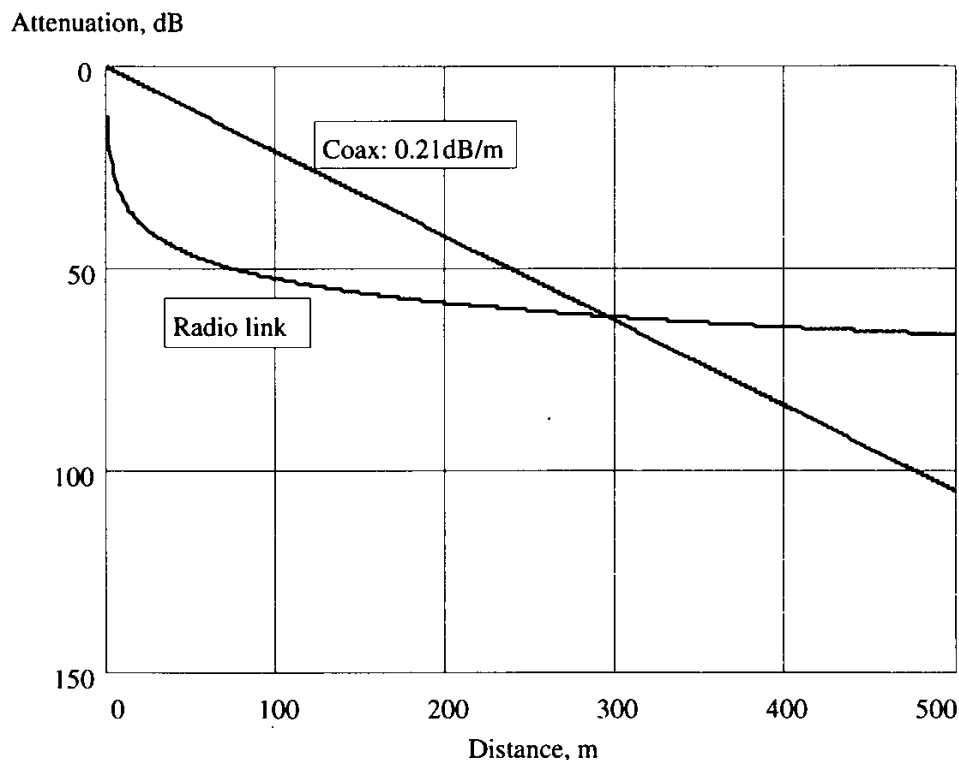



## 5. The radio-frequency spectrum.

**Table 1.1:** General designation of frequency bands

Frequency band	EM wavelength	Designation	Services
3-30 kHz	100-10 km	Very Low Frequency (VLF)	Navigation, sonar*, submarine
30-300 kHz	10-1 km	Low Frequency (LF)	Radio beacons, navigation
300-3000 kHz	1000-100 m	Medium Frequency (MF)	AM broadcast, maritime/ coast-guard radio
3-30 MHz	100-10 m	High Frequency (HF)	Telephone, telegraph, fax; amateur radio, ship-to-coast and ship-to-aircraft communication
30-300 MHz	10-1 m	Very High Frequency (VHF)	TV, FM broadcast, air traffic control, police, taxicab mobile radio
300-3000 MHz	100-10 cm	Ultrahigh Frequency (UHF)	TV, satellite, radiosonde, radar
3-30 GHz	10-1 cm	Super high Frequency (SHF)	Airborne radar, microwave links, satellite, land mobile communication
30-300 GHz	10-1 mm	Extremely High Frequency (EHF)	Radar, experimental

**Table 2.1:** Microwave-band designation

Frequency	Old	New
<b>500-1000 MHz</b>	VHF	C
<b>1-2 GHz</b>	L	D
<b>2-3 GHz</b>	S	E
<b>3-4 GHz</b>	S	F
<b>4-6 GHz</b>	C	G
<b>6-8 GHz</b>	C	H
<b>8-10 GHz</b>	X	I
<b>10-12.4 GHz</b>	X	J
<b>12.4-18 GHz</b>	Ku	J
<b>18-20 GHz</b>	K	J
<b>20-26.5 GHz</b>	K	K
<b>26.5-40 GHz</b>	Ka	K

\* Sonar (an acronym for Sound, Navigation and Ranging) is a system for underwater detection and location of objects by acoustical echo. The first sonars, invented during World War I by British, American and French scientists, were used to locate submarines and icebergs. Sonar is an American term dating from World War II.